



**stowmate**<sup>®</sup>  
BagTrac Storage System's

# A better way to mount your hooks



BagTrac support rails, designed specifically for use with your Safehook Ihook products. Stowmate offers End-Users and Specifiers a smarter, safer way to wall mount bag and hat hooks.

Interlocking aluminium rail extrusions securely fixed to a wall offer a low maintenance, heavy duty fixing alternative to traditional wooden rails.

- Easy to install Wall & Floor Mounted Systems.
- Fire resistant construction. (Optional Cast Al Joiner/EOR cap)
- Commercial grade 20um anodized finish suitable for out door usage.
- Hidden wall fixings, clean, modern design.
- Smart clean modern design, wont rust or fade.
- Durable Heavy Duty Commercial Construction.
- Free Standing Fixed Pedestal Base FS2400 dual sided storage.

Maintenance is a breeze, light weight Aluminium construction won't need painting, won't rust, won't rot and its naturally bug resistant, perfect for use indoors or out.

Manufactured & designed in Australia, utilizing low-carbon aluminium.

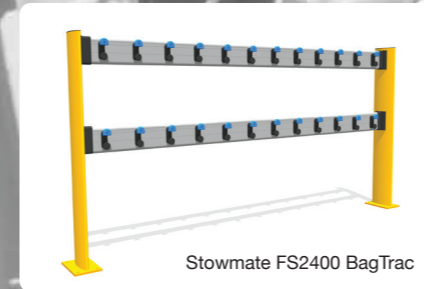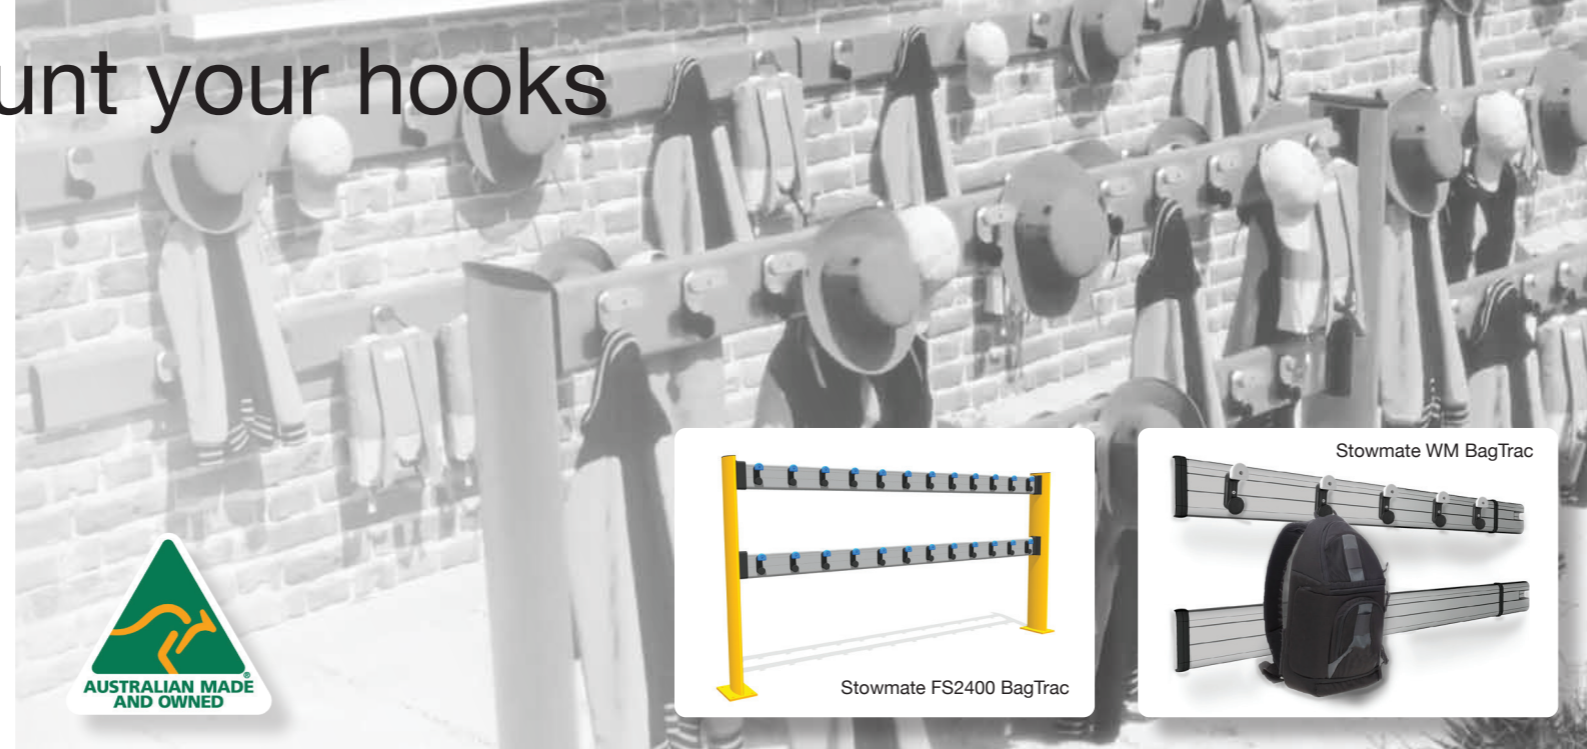

**Heavy Duty**  
**Light Weight**  
**Low Carbon Al**  
**Non Combustible**  
**15 Year Warranty**

# Related Products



EuroV2 Moulded Bag Hooks



Cast Aluminium Ihook-AI



FS2400 Inline Rail Extensions



Assembly Instructions

## Additional Product Information

Stowmate Wall Mounted (WM) rails supplied in 3.0m lengths x 152mm x 34mm. Stowmate FS2400 BagTrac Free Standing units measure ~2.4m units long x 1.300m high x 326.5mm wide.

### Material/Finishes

Low Carbon rails and snap covers are supplied finished with a fine media texture and a clear 20um anodized finish as standard. Standard UV inhibited & moulded end of row caps & rail joiners colour black. Stowmate FS2400 Bollards powder coated Safety Yellow (other colours available on application), fully welded Al base, moulded GRN rail/bollard connectors colour black.

### Fire Retardancy

Aluminium extrusions & optional Rail Joiners/Row Caps when combined with Safehook Ihook-Al products provide a fire resistant product that meets Australian National Construction Code requirements, and will not compromise the Combustible nature of a designated Non Combustible wall.

### Installation

Easy to install, designed to accommodate Safehook Ihook Mk2, EuroV2, OZIhook & Ihook AI's hooks. Moulded EOR caps, joiners & assembly fasteners included. Wall units trimmed to size at site by customer. Note wall fasteners not included. We suggest the use of M10 or M12 wall fasteners with washer's positioned securely 150mm in from the end of each rail, maximum unsupported span 1.35m. Refer Stowmate Assembly Instructions for more information @ [www.safehook.com.au](http://www.safehook.com.au).